




Give life to your project

Panel ALBE and ALBE120



Panel ALBE and ALBE120

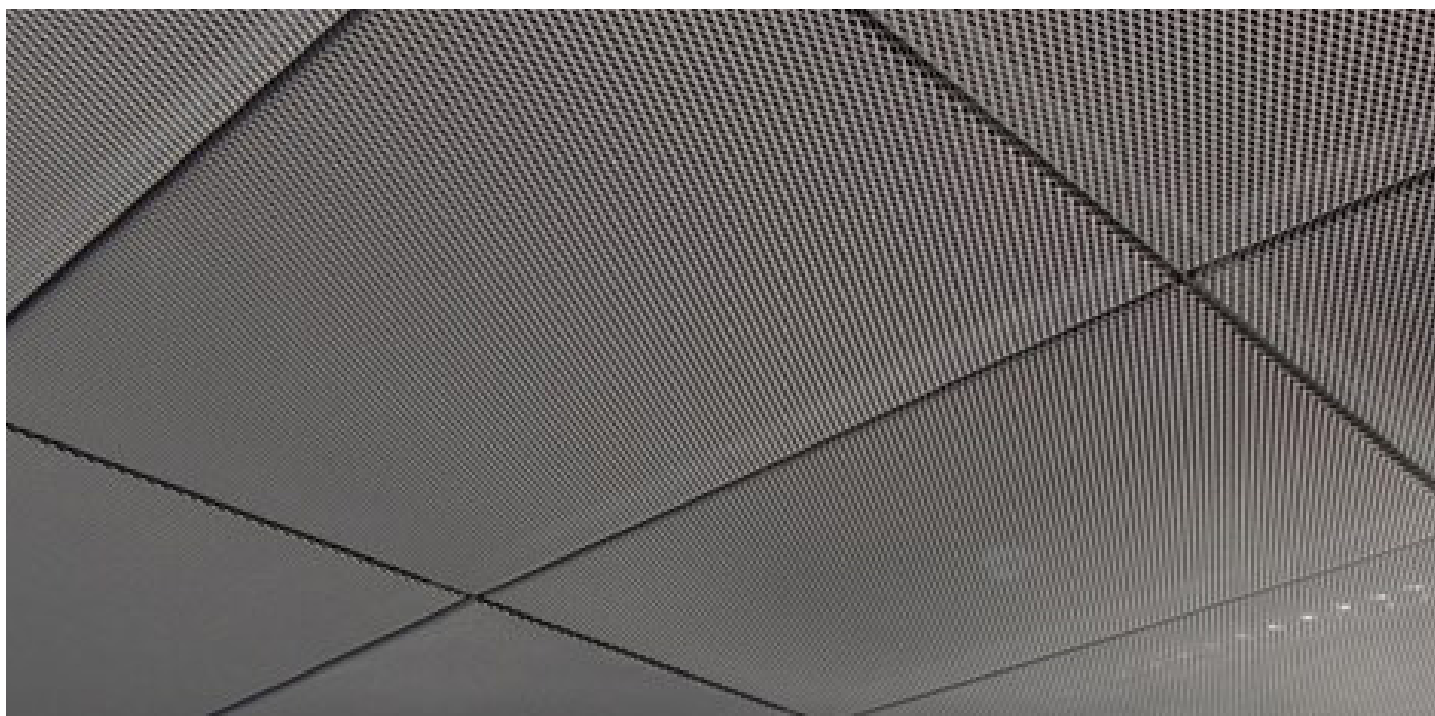

Description

The expanded mesh panels have a technical design and are suitable for areas that require elevated noise reduction with the use of sound absorption materials.

The Albe panel is made of metal mesh and it's mounted on an upside-down T support frame with bases of 15 or 24 mm or on a Micro Line structure.

Panels have sharp borders with a slight 8/10 mm indent.

Main features

Panel module



-Mod. ALBE: 600x600 mm
-Mod. ALBE120: 1200x600 mm

Material and Colour


-Powder coated Steel:
RAL 9010, 9003, 9006
(other RAL colours available
on request)
-Chrome

Panel ALBE


Structure

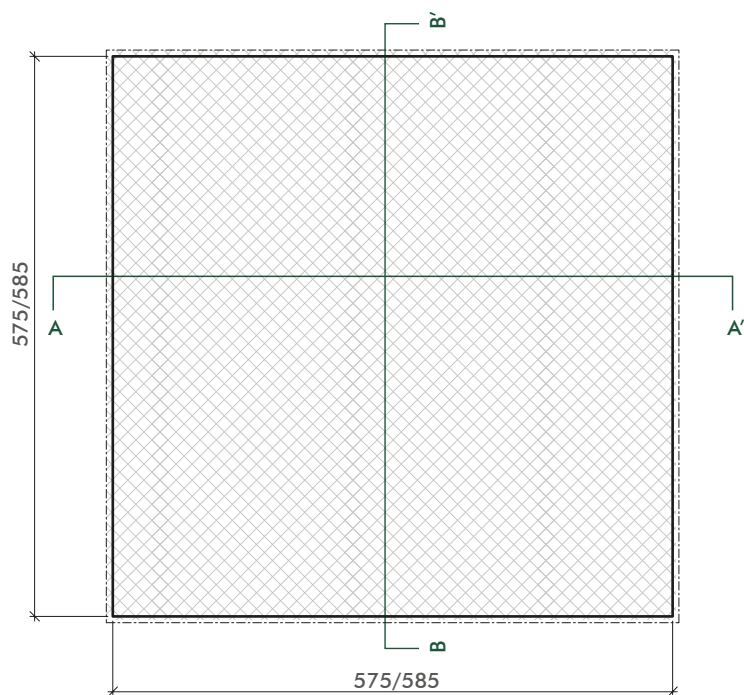

T15




T24




Micro Line


Panel ALBE120

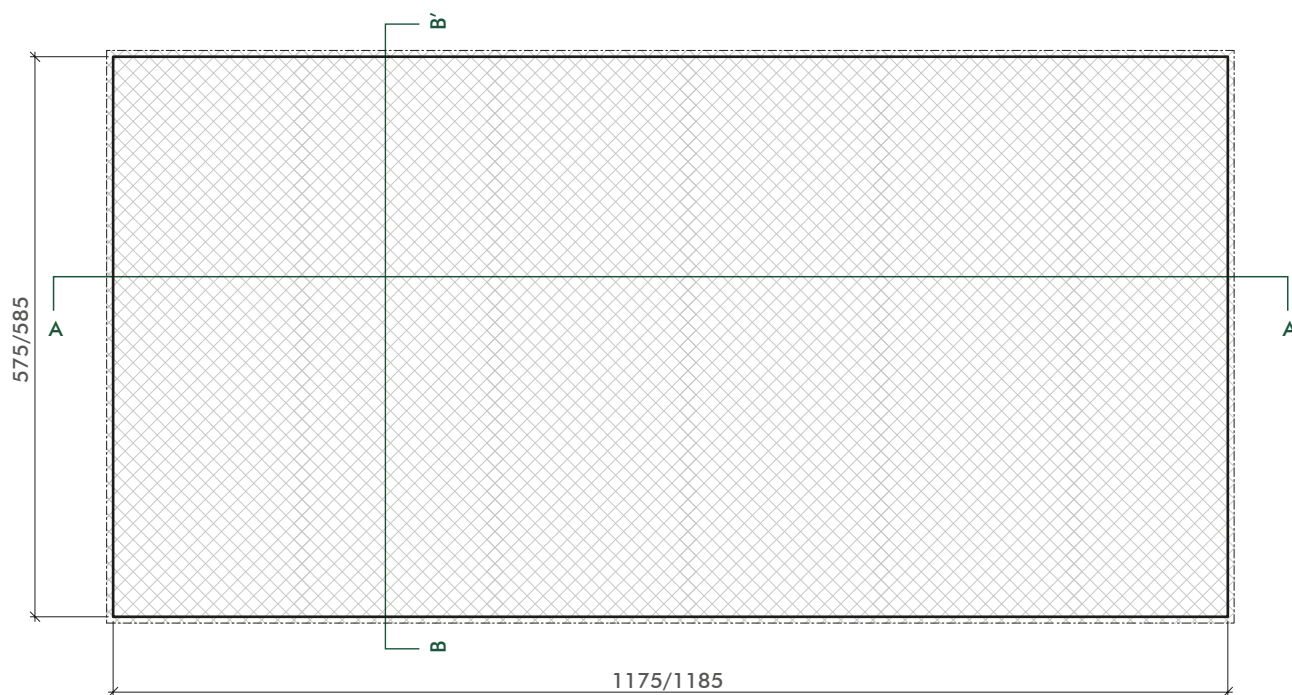


Section A - A' _ on T15/24 structure _ module 600x600 mm e 600x1200 mm

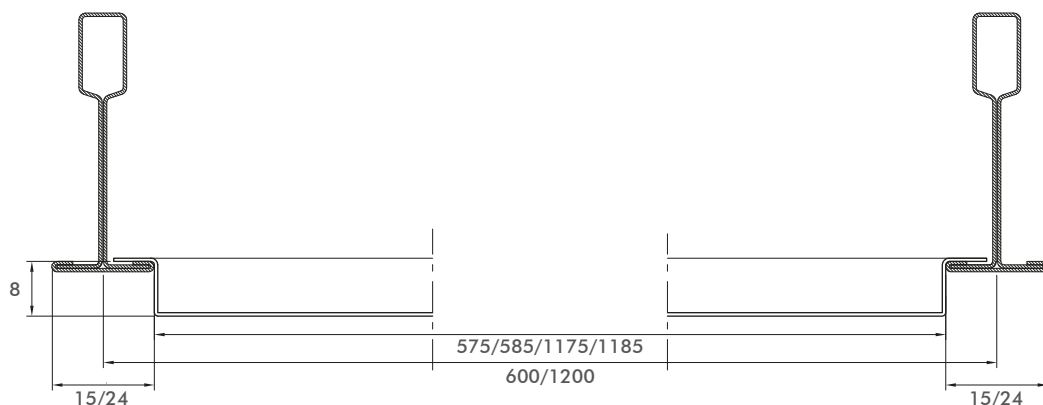


Section B - B' _ on T15/24 structure _ module 600x600 mm e 600x1200 mm

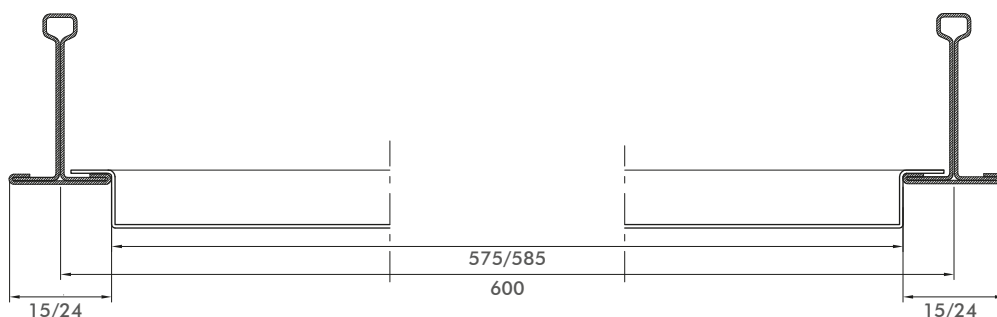


Section A - A' _ on Micro Line structure _ module 600x600 mm e 600x1200 mm

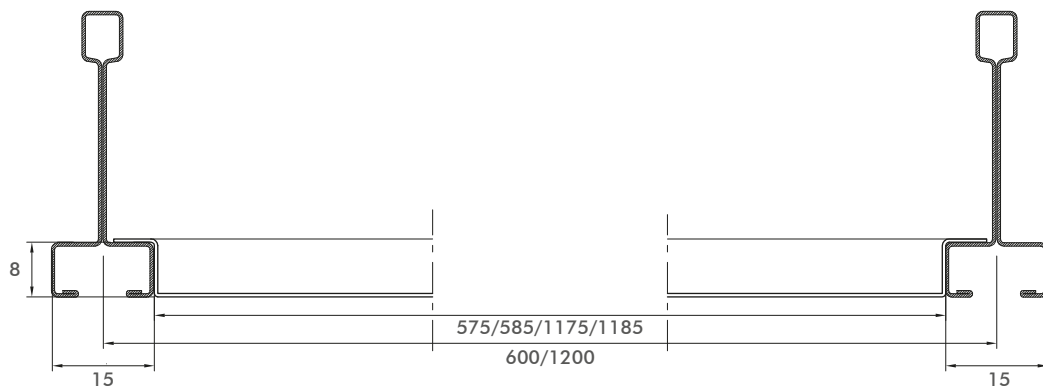


Section B - B' _ on Micro Line structure _ module 600x600 mm e 600x1200 mm

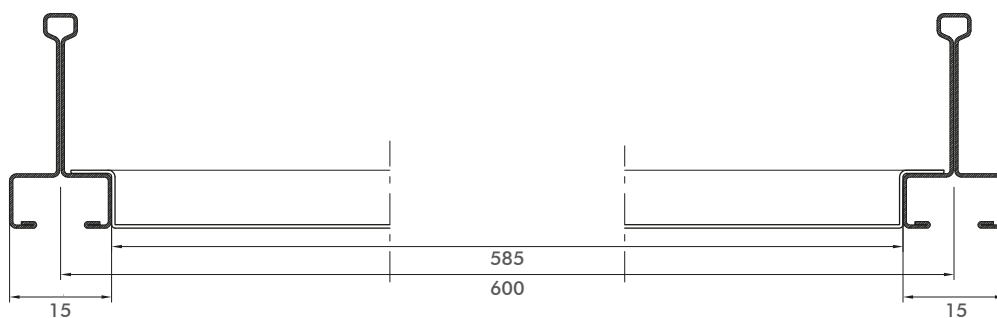


Perimetral's details

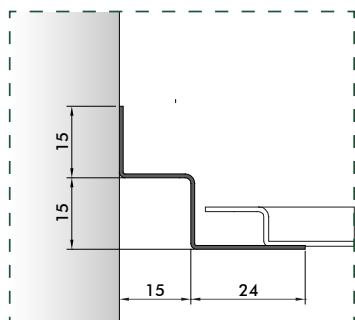


P11_L 3000 mm

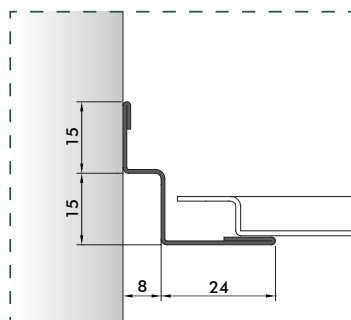


P11/A_L 3050 mm

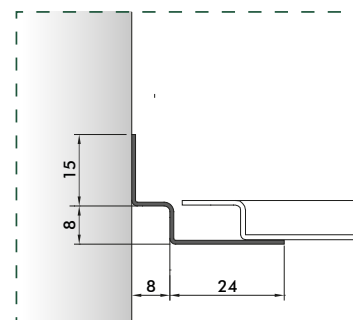


P12_L 3000 mm

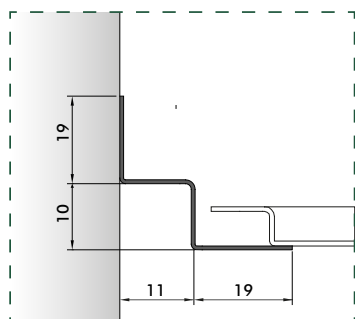


P15/A_L 3000 mm

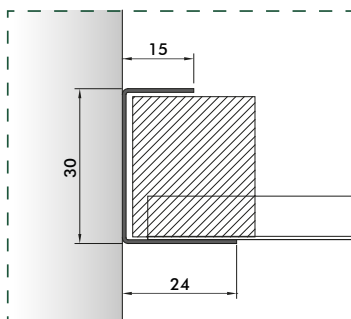

P10 * _L 3000 mm

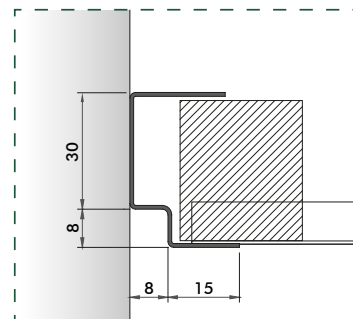

P13 * _L 3000 mm

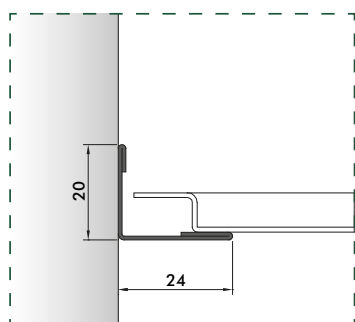

P2_L 3000 mm


Each profile can be achieved with customized section in according to customer's requests.

* Supplied on request with polystyrene to maintain in the form the cut panel (supplied not pre-assembled)


Mesh types

Square


Q6

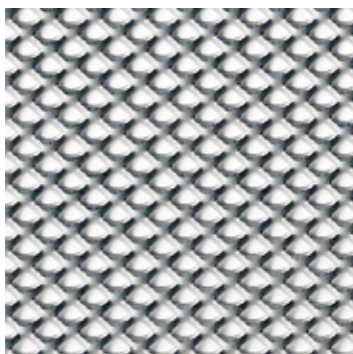

Q8

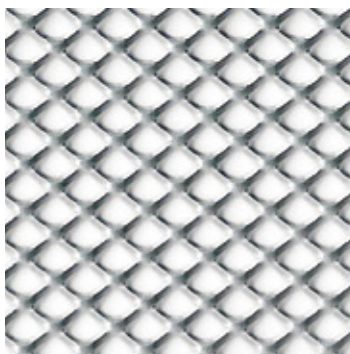


Q10

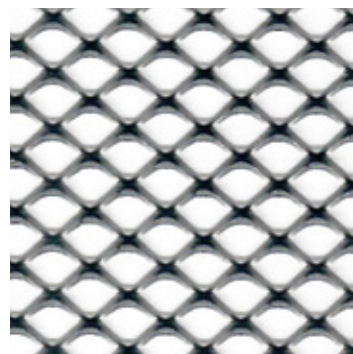


Rhomboidal

R6

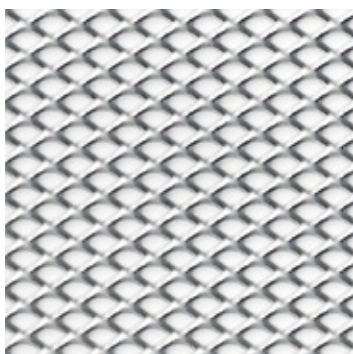

R16

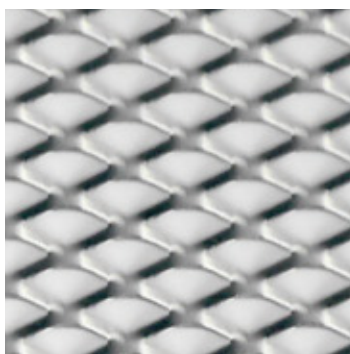

*For other types of mesh, contact the technical or the sales office.

Performance and technical data



Recycled content (%)*

<30



Reaction to fire class**

A1



%RH

95

<30	A1	95
<30	A1	95
<30	A1	95
<30	A1	95
<30	A1	95
<30	A1	95
<30	A1	95

* please note that all aluminum and steel products are 100% recyclable.

** Intended use of the product according to EN13964: 2014 / A1: 2006:

Components of suspended ceiling membranes for internal use in buildings. System of assessment and verification of constancy of performance of the construction product: SYSTEM 3.

*** for any other technical information, please contact our sales or technical office.

General informations

Technical Standards

All Profilsystem products are CE marked according to EN 13964. They are also accompanied by the Declaration of Performance (D.O.P.) as required by European regulation 305/11 concerning the placing of construction products on the market.

For applications in particularly aggressive environments such as swimming pools, industrial installations with chemical and / or corrosive fumes, check the most suitable material and surface treatment with the technical or commercial office of Profilsystem.

Storage

All products are carefully packed and placed on special pallets and secured by strapping and film wrapping. On request we can provide the package complete of cardboard corners, bubble wrap and polystyrene to reduce the risks during transport.

It is always recommended to handle all packaging with the most care, avoiding shocks and practices that damage the contents. The packed material is stored in closed, clean and dry places until the time of pic-up.

Do not expose filmed products to heat sources and do not leave them under the sun.

Installation

The metal ceiling are installed manually by the installer depending on the type and model you choose.

The material should be stored in closed, clean and dry places until the time of installation.

Do not rest on the ground and not leave the products on site without the original package issued at the time of delivery.

Avoid the contact between material and water, solvents, degreasers and aggressive liquids.

Cleaning and Maintenance

Metal ceilings, thank to the easy washing and cleaning are also a guarantee in terms of hygiene.

To remove dust, stains or smudges you can use carefully a clean, dry cloth or moistened with neutral detergent, or non-abrasive and non-aggressive disinfectants.



Give life to your project

ITALY

Head quarter & showroom

Via Don Luigi Sturzo,3 - 20822 Seveso (MB) Italy
tel: +39 0362 625652 - fax: +39 0362 306733
www.profilsystem.com

DUBAI

Sales offices & showroom

TOP 27 CONSULTING JLT
Office 3205 - JBC2
Cluster V - JLT
Dubai - United Arab Emirates
middleeast@profilsystem.com

CHILE

Sales offices & showroom

COMERCIAL E.V.A. Limitada
Avenida La Dehesa 1844
Ufficio 714
Lo Barnechea, Santiago de Chile
tel: +59 9 51599037
info@nenzi.cl

SPAIN

Sales offices & showroom

PROFILSYSTEM EPC
Techos de Aluminio S.L.
Avinguda Garraf 15/B
08880 Cubelles, Barcellona
tel: +34 666 431 921
info@profilsystem.es

Our offices are at your disposal

SALES OFFICE ITALY:

Elis Zappino
elis@profilsystem.com
Skype ID [elis.zappino](#)

Dott. Riccardo Ghezzi
riccardo@profilsystem.com
Skype ID [ghezziriccardo](#)

EXPORT OFFICE:

Dott. Alexa Maj
export@profilsystem.com
Skype ID [Alexa Maj](#)

TECHNICAL OFFICE:

Arch. Manuela De Cristofaro
tecnico@profilsystem.com
Skype ID [Manuela De Cristofaro](#)

SHIPPING OFFICE:

Chiara Talon
chiara.talon@profilsystem.com
Skype ID [talon.chiara](#)