PROFILSYSTEM®


Give life to your project

Jolly B15 and B15 ALTO




Jolly B15 and B15 ALTO

JOLLY B15

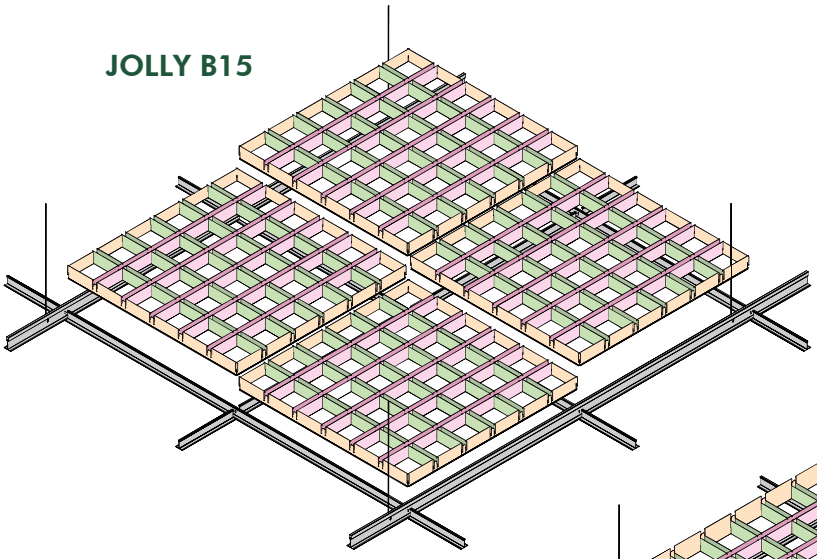

JOLLY B15 ALTO

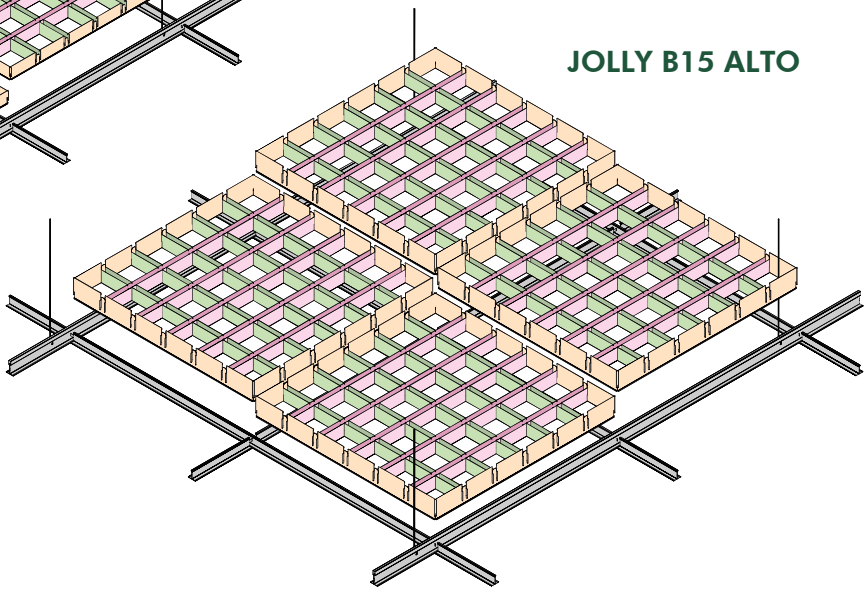

Technical data

Panel module

Jolly B15 and B15 ALTO:
600 x 600 mm (595 X 595 mm)

Mesh

50 x 50	mm	100 x 100	mm
60 x 60	mm	120 x 120	mm
75 x 75	mm	150 x 150	mm
86 x 86	mm	200 x 200	mm

Materials

Aluminium Powder coated RAL 9003, 9006

**other RAL colors available upon request*

Fire reaction

A1
norm of reference: UNI EN 13501-1

Resistence to humidity (RH)

RH 95%


Sustainability

Recycled content	Green certifications	VOC content
<30%	Leed, Well, Bream	A+

ISO 9001:2015 NR.12029/0


All dimensions are nominal and expressed in mm.
All details are subject to change without notice.
For any clarifications, please contact our commercial office - +39 0362 625652 - info@profilsystem.com

Jolly B15 - Module

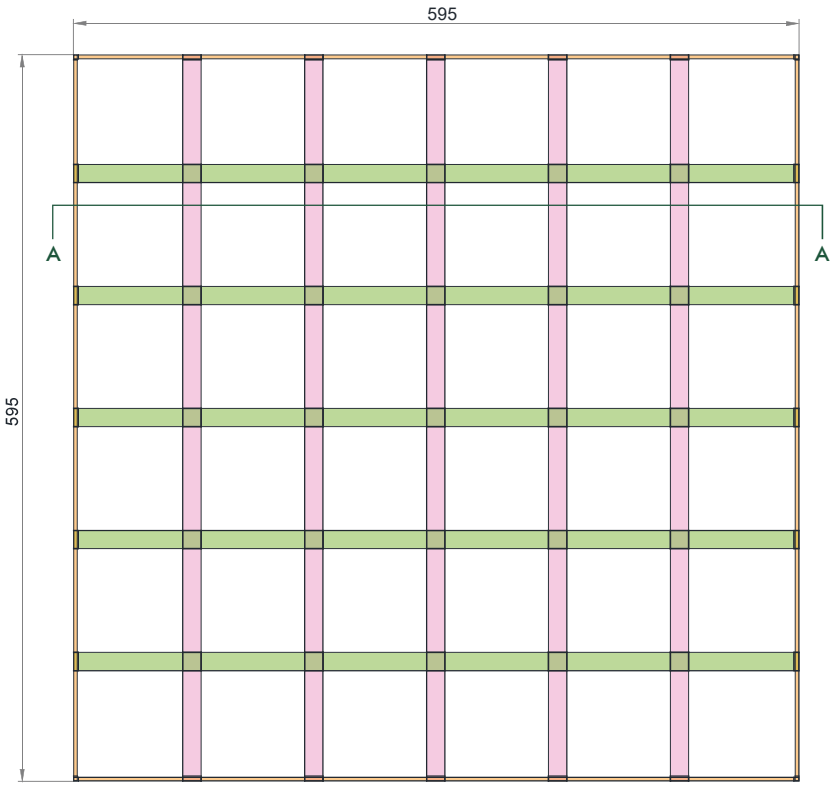

Element

EM / EF




B: 15 mm / H: 38 mm


*Supplied in separated pieces; (pre-assembled modules can be supplied on request)

Structure


T15



T24



Jolly B15 - Elements

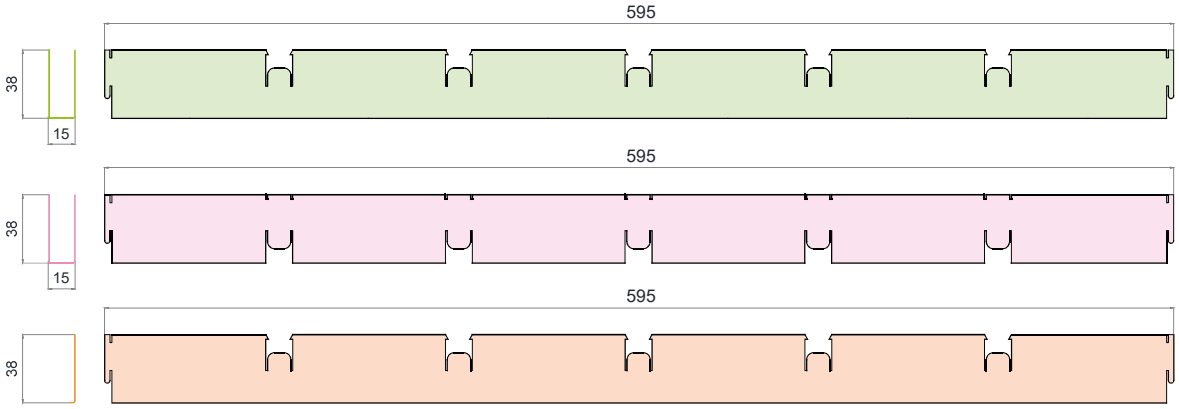


EM (male)

EF (female)


Side Element

Jolly B15 - Section A-A

Jolly B15 on T15 structure

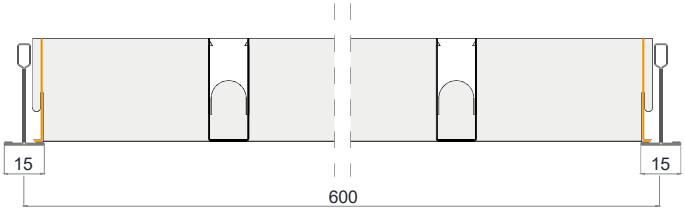


Jolly B15 on T24 structure

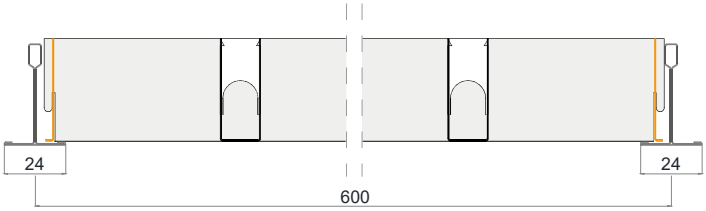


All dimensions are nominal and expressed in mm.
All details are subject to change without notice.
For any clarifications, please contact our commercial office - +39 0362 625652 - info@profilsystem.com

Jolly B15 ALTO - Module

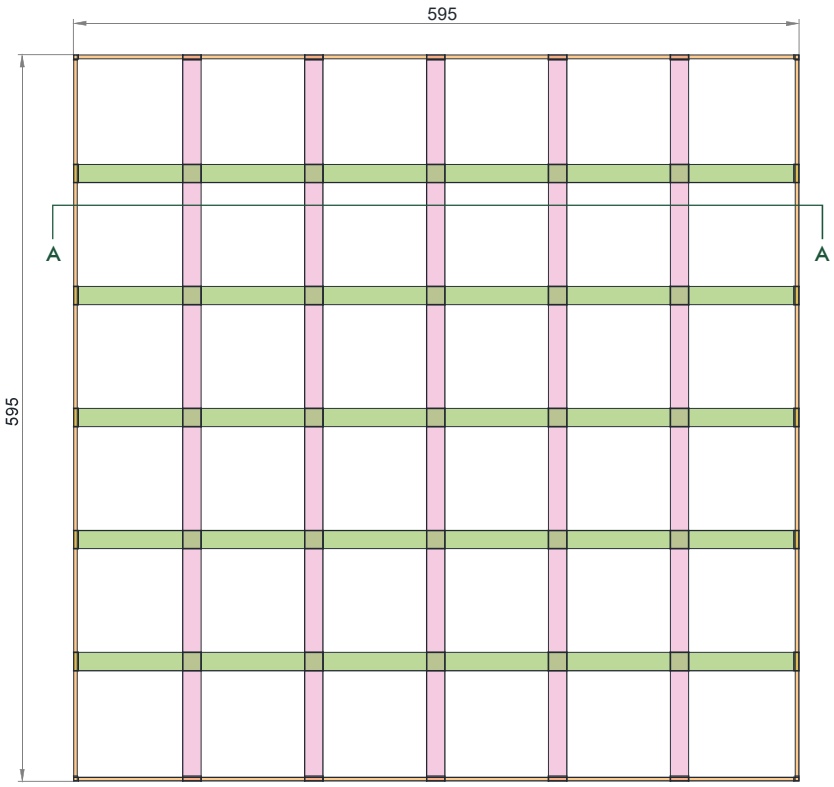


Element

EM / EF



B: 15 mm / H: 38 mm

Side Element




B: 15 mm / H: 58 mm


*Supplied in separated pieces; (pre-assembled modules can be supplied on request)

Structure


T15



T24



Jolly B15 ALTO - Elements

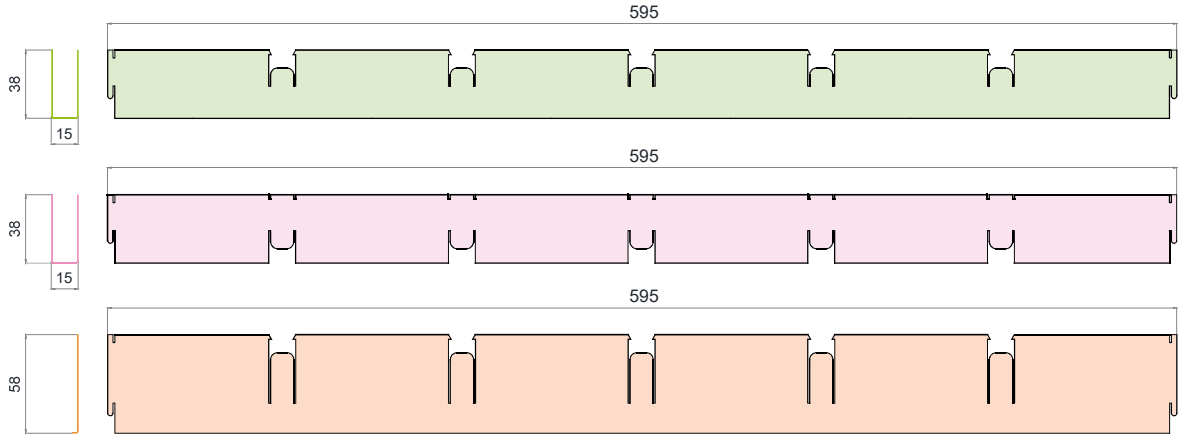


EM (male)

EF (female)


Side Element

Jolly B15 ALTO - Section A-A

Jolly B15 ALTO on T15 structure

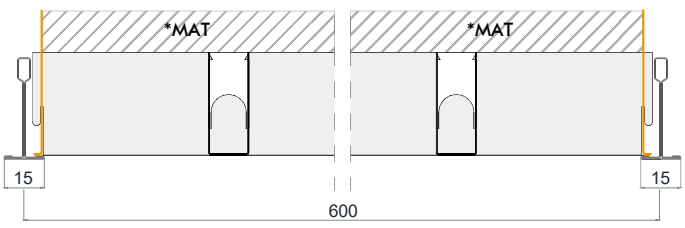

Jolly B15 ALTO on T24 structure

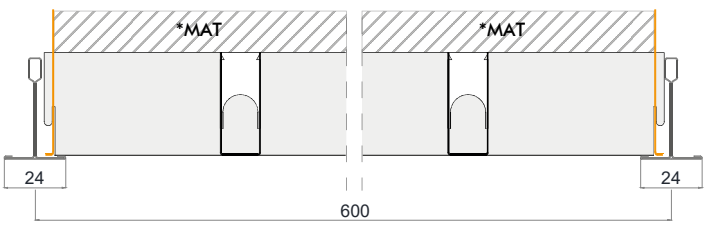


*mat not provided

All dimensions are nominal and expressed in mm.
All details are subject to change without notice.
For any clarifications, please contact our commercial office - +39 0362 625652 - info@profilsystem.com


Jolly B15 and Jolly B15 ALTO - Mesh

50 x 50 mm

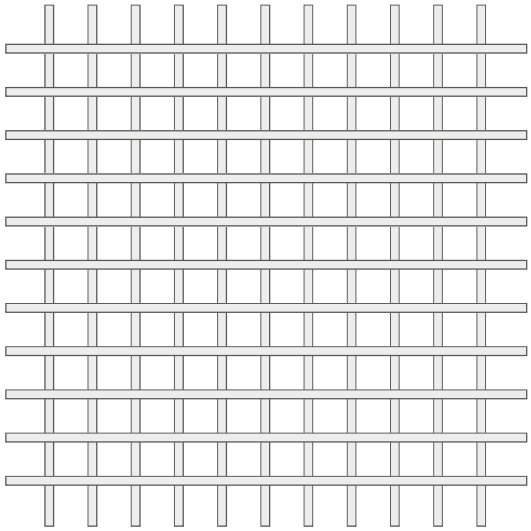


MESH	NUMBER OF ELEMENTS FOR 600 X 600 MODULE	
	EM (male)	EF (female)
50 x 50	11	11

60 x 60 mm

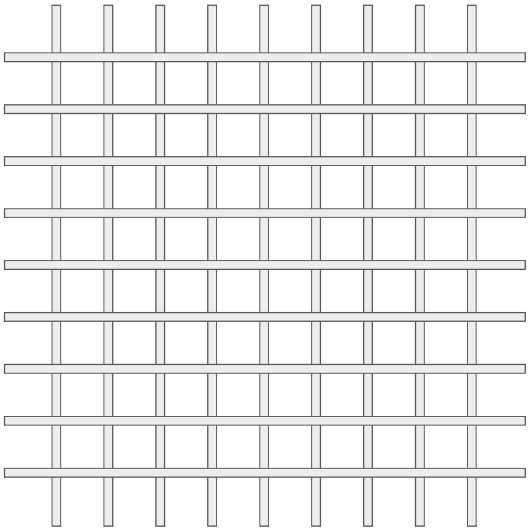


MESH	NUMBER OF ELEMENTS FOR 600 X 600 MODULE	
	EM (male)	EF (female)
60 x 60	9	9

75 x 75 mm

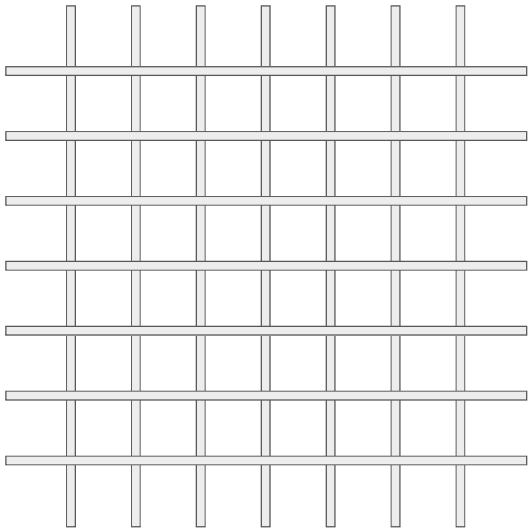

MESH	NUMBER OF ELEMENTS FOR 600 X 600 MODULE	
	EM (male)	EF (female)
75 x 75	7	7

86 x 86 mm

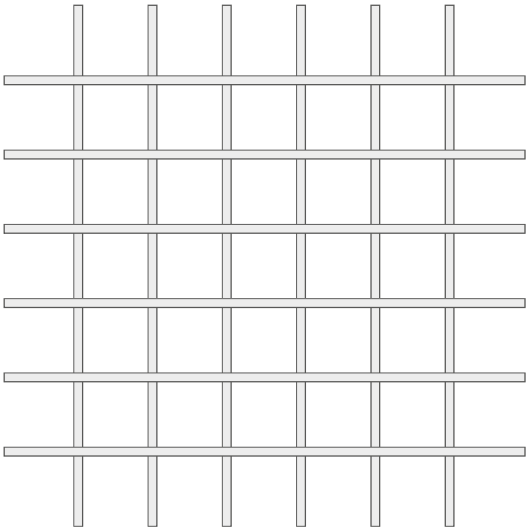


MESH	NUMBER OF ELEMENTS FOR 600 X 600 MODULE	
	EM (male)	EF (female)
86 x 86	6	6

All dimensions are nominal and expressed in mm.
All details are subject to change without notice.
For any clarifications, please contact our commercial office - +39 0362 625652 - info@profilsystem.com


Jolly B15 and Jolly B15 ALTO - Mesh

100 x 100 mm

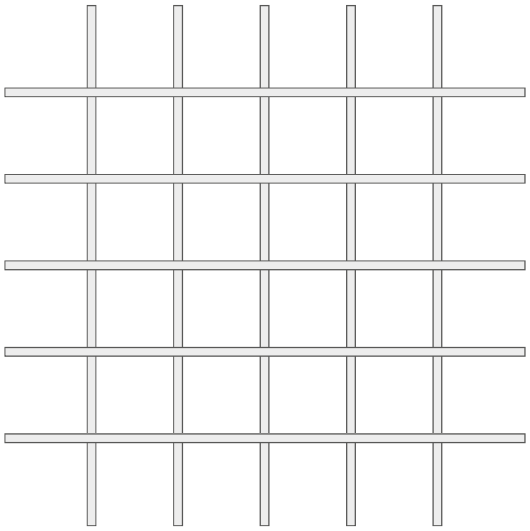


MESH	NUMBER OF ELEMENTS FOR 600 X 600 MODULE	
	EM (male)	EF (female)
100 x 100	5	5

120 x 120mm

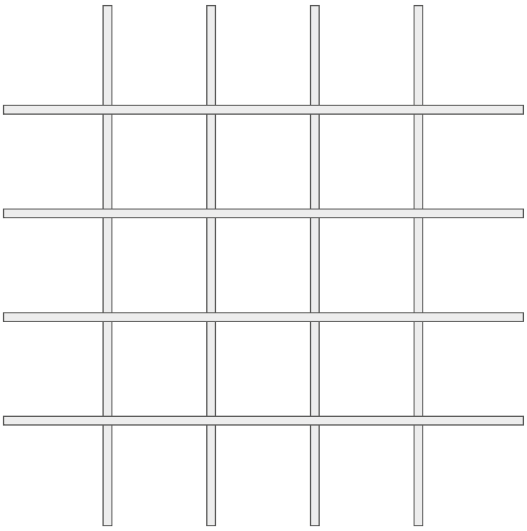


MESH	NUMBER OF ELEMENTS FOR 600 X 600 MODULE	
	EM (male)	EF (female)
120 x 120	4	4

150 x 150 mm

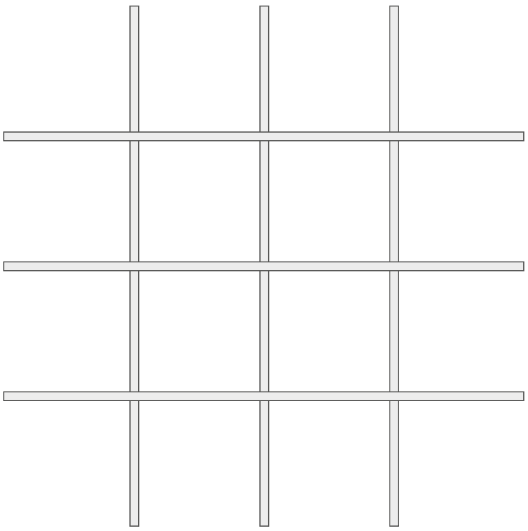

MESH	NUMBER OF ELEMENTS FOR 600 X 600 MODULE	
	EM (male)	EF (female)
150 x 150	3	3

200 x 200 mm

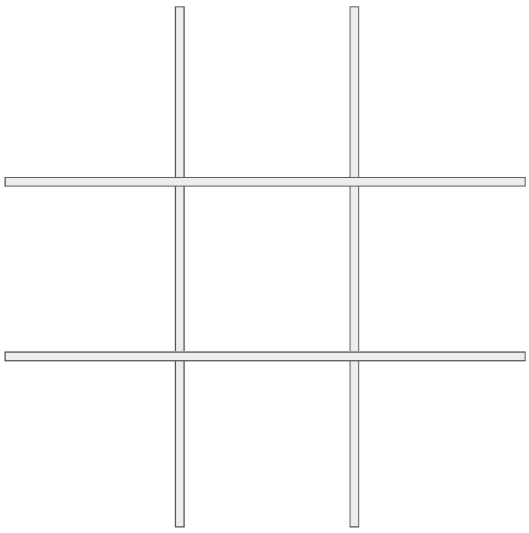

MESH	NUMBER OF ELEMENTS FOR 600 X 600 MODULE	
	EM (male)	EF (female)
200 x 200	2	2

All dimensions are nominal and expressed in mm.
All details are subject to change without notice.
For any clarifications, please contact our commercial office - +39 0362 625652 - info@profilsystem.com

General informations

Technical standards

All Profilsystem products are CE marked according to EN 13964. They are also accompanied by the Declaration of Performance (D.O.P.) as required by European regulation 305/11 concerning the placing of construction products on the market.
For applications in particularly aggressive environments such as swimming pools, industrial installations with chemical and / or corrosive fumes, check the most suitable material and surface treatment with the technical or commercial office of Profilsystem.

Storage

All products are carefully packed and placed on special pallets and secured by strapping and film wrapping. On request we can provide the package complete of cardboard corners, bubble wrap and polystirene to reduce the risks during transport.

It is always recommended to handle all packaging with the most care, avoiding shocks and practices that damage the contents. The packed material is stored in closed, clean and dry places until the time of pic-up.
Do not expose filmed products to heat sources and do not leave theme under the sun.

Installation

The metal ceiling are installed manually by the installator depending on the type and model you choose.
The material should be stored in closed, clean and dry places until the time of installation.

Do not rest on the ground and not leave the products on site without the original package issued at the time of delivery.
Avoid the contact between material and water, solvents, degreasers and aggressive liquids.

Cleaning and Maintenance

Metal ceilings, thank to the easy washing and cleaning are also a guarantee in terms of hygiene.
To remove dust, stains or smudges you can use carefully a clean, dry cloth or moistened with neutral detergent, or non-abrasive and non-aggressive disinfectants.

PROFILSYSTEM®

Give life to your project

Our offices are at your disposal

ITALIA

Head quarter & showroom

Via Don Luigi Sturzo,3 - 20822 Seveso (MB) Italy

tel: +39 0362 625652 - fax: +39 0362 306733

www.profilsystem.com